

- 10 SUPER BRIGHT LED ALARMS
- BUILT-IN AUDIBLE HORN
- CUSTOMIZED MESSAGE PANELS
- DC OR AC OPERATION
- INCLUDES ALARM-SILENCE BUTTON AND LAMP-TEST BUTTON




### GENERAL DESCRIPTION

The Model 18-ZAP-10 Zone Annunciator Panel is a simple, inexpensive "Light Box" that provides indication of alarm status for up to 10 separate relay or switch inputs. The back lit super bright LED's clearly indicate what input has an alarm condition. Messages may be quickly added or changed by using the dry transfer lettering kit included with each panel.

The unit also includes an audible horn, acknowledge/silence push button and lamp test switch that utilize 24 VDC. Modular construction allows multiple unit mounting.


Use of a standard 4 gang utility box facilitates surface mounting. Specify 18-ZAP-SB (4.5W × 8.2H × 3D). Two output terminals provide a voltage signal upon alarm actuation.

NOTE: DIMENSIONS 7-1/4 x 2-5/8  
EXTEND 1-5/16 DEEP BEHIND PANEL

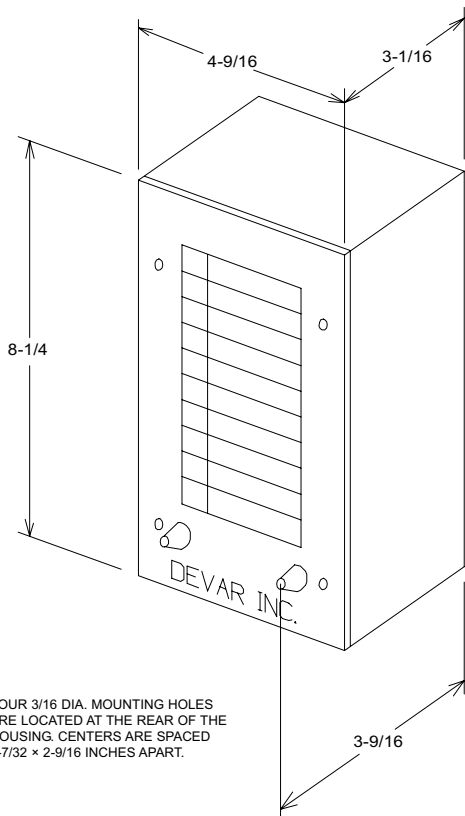


FOUR 3/16 DIA. MOUNTING HOLES ARE LOCATED AT THE REAR OF THE HOUSING. CENTERS ARE SPACED 6-7/32 x 2-9/16 INCHES APART.


**SURFACE BOX DIMENSIONS**

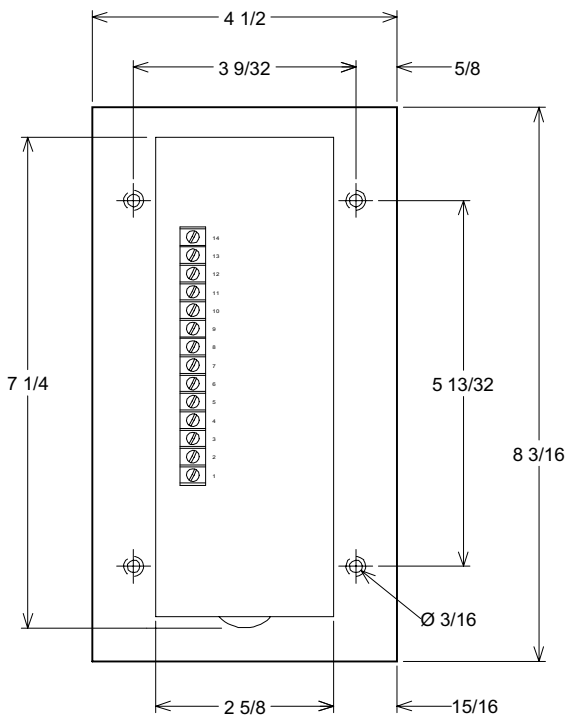

**REAR VIEW DIMENSIONS  
(FOR 4-GANG UTILITY BOX MOUNTING)**

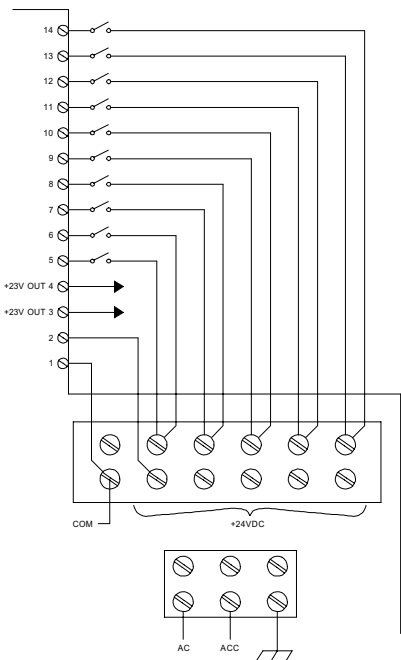

**FIELD WIRING  
120VAC OPERATIONAL POWER**

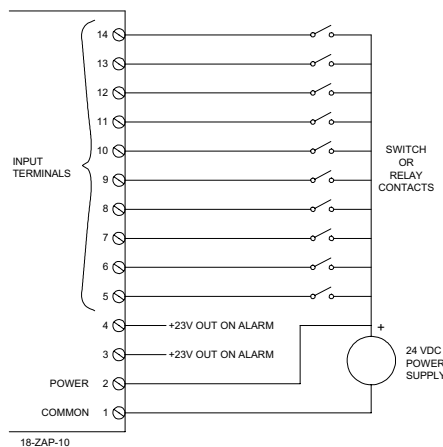

**FIELD WIRING  
24VDC OPERATIONAL POWER**

**DEVAR Inc.**

706 Bostwick Ave., Bridgeport, CT 06605-2396  
 TEL: 203-368-6751, 1-800-566-6822  
 FAX: 203-368-3747  
<http://www.devarinc.com>  
 e-mail: info@devarinc.com